

HAORI

A COOLER STYLE
OF LIVING



HAORI

INSPIRED BY
JAPANESE TRADITION.
DESIGNED FOR
MODERN LIVING

TOSHIBA | HAORI



HAORI redefines what the air-conditioner means in the modern home. Inspired by the traditional Japanese outer jacket, it is designed with form and aesthetics to harmonise with your interiors. The slim line design and stylish outer fabric cover seamlessly adds another designer element within your home.



STYLE FLEXIBILITY. INFINITE POSSIBILITIES

Customise the HAORI to match your interiors with fabric cover colour options. Easily detach the cover and replace it with the colour of your choice to suit your room's interior and style preference.

Featuring quality European-made Acacia fabric, renowned for strength and durability, the fabric covers are washable, fire retardant and non-toxic. Fabric colours will remain vibrant over time, thanks to fade-resistant qualities against sun exposure and other environmental factors.



STAY COOL AND IN CONTROL

Intuitive remote control functions include Power select and ECO modes to help reduce energy usage, and Hi-Power mode for rapid cooling.



*Discover the latest range of fabric colour at www.shophaori.com online store.


ULTIMATE COOLING CONVENIENCE

Take control and cool your home from anywhere, anytime with HAORI's integrated Wi-Fi. Connect to your air-conditioner network with the new Toshiba Home AC Control app, available on iOS and Android, for a fast and convenient way to control the comforts of your home and monitor energy usage.




ENERGY MONITORING

Capable of monitoring 16 units at the same time, you can now monitor the energy consumption of your HAORI from anywhere – perfect for estimating your monthly electric bill via a smartphone.

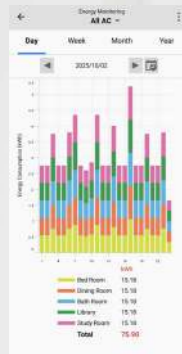


SMART VOICE CONTROL

Tell HAORI how to cool your home with smart speaker voice control functions compatible with Google Home Assistant and Amazon Alexa.




5-TICK ENERGY RATING

Enjoy cool comfort with HAORI's low power consumption. A 5-tick energy rating – the most energy efficient rating by NEA (The National Environment Agency) – delivers reduced energy costs and increased savings.

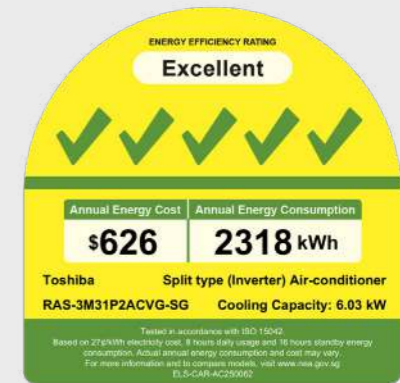

ENERGY SAVING TECHNOLOGY

Cools room faster and with less energy. Toshiba's innovative DC Hybrid inverter technology intelligently regulates cooling and maintains consistent room temperature efficiently with lower energy consumption.

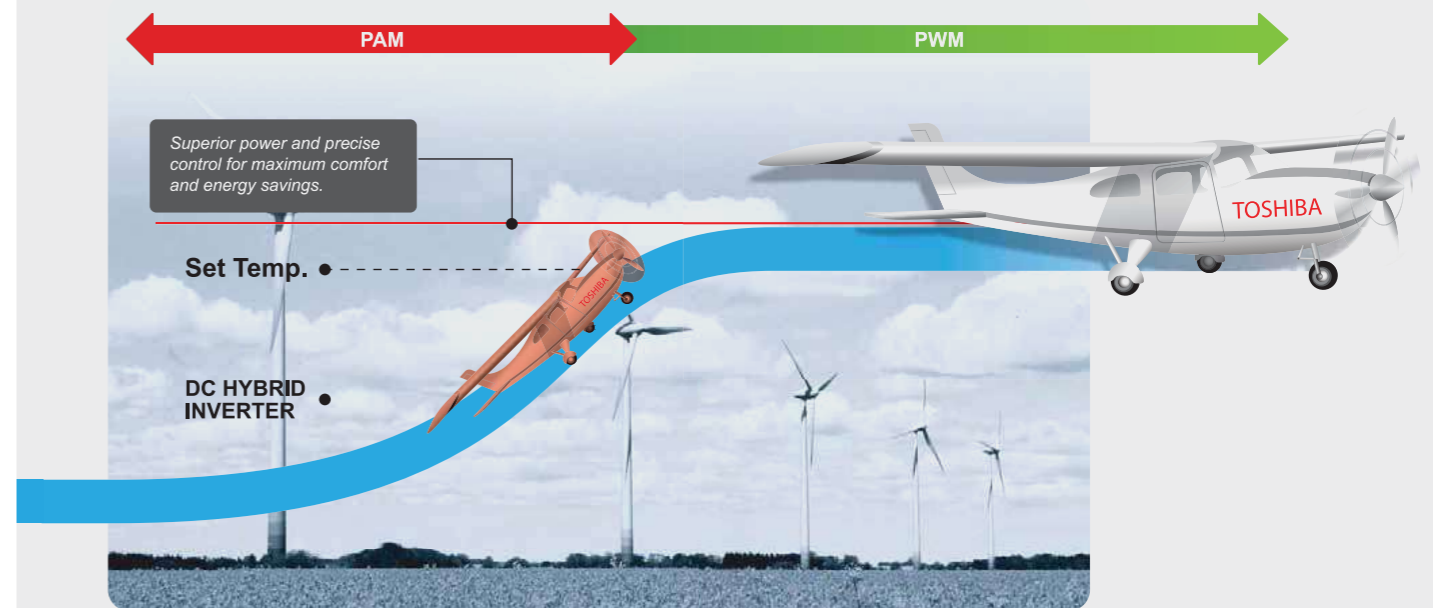




PLASMA IONIZER

SUPERIOR INDOOR AIR QUALITY

Breathe easy with the HAORI. Toshiba's powerful Plasma Ionizer accelerates the capture and neutralisation of air pollutants to ensure your indoor air is always clean, fresh, and healthy.


The Ultra Pure Filter provides up to 95% purification of PM1.0 capturing micro-organisms and fine particles – creating healthy living spaces.

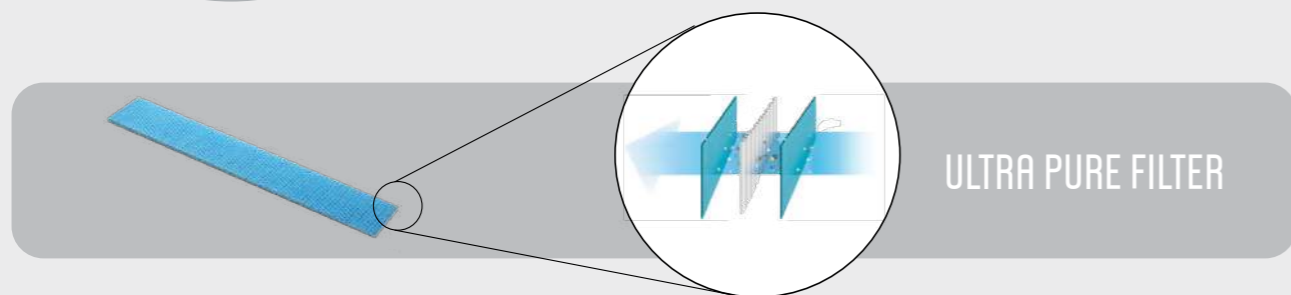


ULTRA PURE FILTER

EASY CARE

Toshiba's innovative Aqua Resin-coated coil enables trapped impurities to drain more effectively so your air-conditioner stays clean and new – always. Experience better energy efficiency, and healthier and fresher air with Haori.

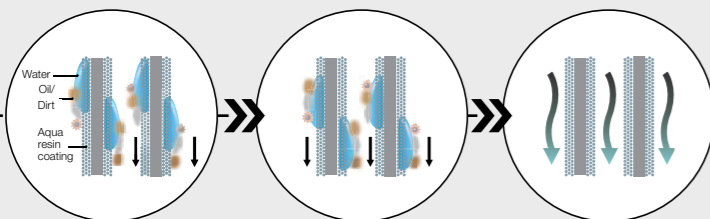


The self-cleaning function continues to run the blower at low speeds after shut down to dry the coils, preventing mould growth to keep air fresh and clean.

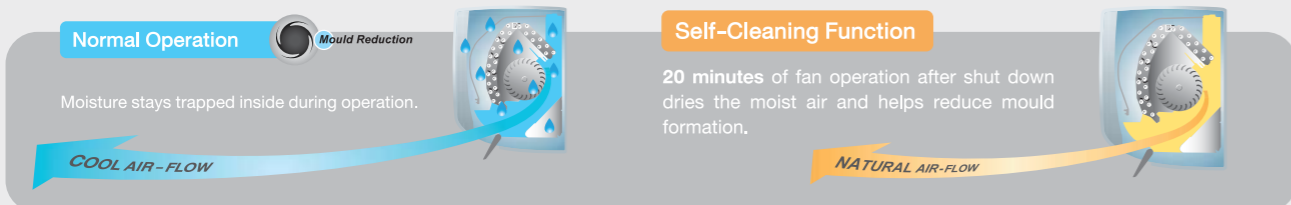

COOL FOR YOUR HOME, COOL FOR THE ENVIRONMENT

Enjoy cool comfort with lower carbon footprint. HAORI's climate-friendly R32 refrigerant has up to 72% lower CO2 emissions compared to other refrigerants and contributes to zero ozone depletion.

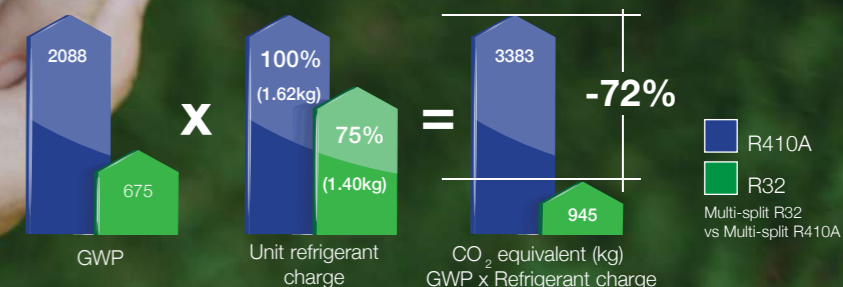

Specifications

Indoor unit

Model number		RAS-M10S4KCVRG-SG	RAS-M13S4KCVRG-SG	RAS-M18S4KCVRG-SG
Air flow (H/L)	m3/h	600/300	670/320	690/340
Sound pressure level (H/L/Q)	dB(A)	41/22/19	43/23/19	45/25/21
Dimensions (HxWxD)	mm	300 x 987 x 210	300 x 987 x 210	300 x 987 x 210
Weight	kg	11	11	12
Flare connections - Gas	mm	9.52	9.52	12.7
Flare connections - Liquid	mm	6.35	6.35	6.35

Specifications



Outdoor unit

Outdoor Model Number, RAS	System 2 2-rooms 2M21P2ACVG-SG	System 3 3-rooms 3M31P2ACVG-SG	System 4 4-rooms 4M41P2ACVG-SG	System 5 5-rooms 5M51P2ACVG-SG
Cooling capacity (min. - max.) kW	2.00 - 6.00	2.50 - 7.50	3.00 - 8.90	3.70 - 11.50
Cooling capacity (rated) KW	4.5	6.0	6.6	8.3
Power input kW	0.87	1.20	1.20	1.66
Weight COP / Tick rating (Tick)	6.04 / 5	5.78 / 5	6.10 / 5	5.81 / 5
Sound pressure level dB(A)	51	53	54	55
Operating range °C	-10 ~ 46	-10 ~ 46	-10 ~ 46	-10 ~ 46
Dimensions (H x W x D) mm	630 x 800 x 300	630 x 800 x 300	710 x 900 x 320	890 x 900 x 320
Weight kg	41	43	57	64
Compressor type	DC Single rotary	DC Twin rotary	DC Twin rotary	DC Twin rotary
Flare connections - Gas mm	Φ9.52 x 2	Φ12.7 + Φ9.52 x 2	Φ12.7 x 2 + Φ9.52 x 2	Φ12.7 x 2 + Φ9.52 x 3
Flare connections - Liquid mm	Φ6.35 x 2	Φ6.35 x 3	Φ6.35 x 4	Φ6.35 x 5
Max piping length (per unit/total) m	20/30	25/30	20/60	25/80
Max piping height difference m	10	10	15	15
Power supply V/ph/Hz	220-230/1/50	220-230/1/50	220-230/1/50	220-230/1/50

2 Rooms

RAS-2M21P2ACVG-SG

230V

Combination		Unit capacity (kW)		Cooling capacity (KW)			Power input (W)			Operating current (A)			COP
Unit A	Unit B	Unit A	Unit B	Min.	Rated	Max.	Min.	Rated	Max.	Min.	Rated	Max.	Rated
10	-	2.70	-	1.4	2.7	3.2	280	660	830	1.70	3.70	4.40	4.09
13	-	3.70	-	1.4	3.7	4.4	280	1060	1360	1.65	5.25	6.40	3.49
18	-	4.50	-	1.4	4.5	5.0	275	1290	1640	1.60	6.20	7.60	3.49
10	10	2.25	2.25	2.0	4.5	6.0	330	870	1500	1.91	4.25	6.85	5.17
13	10	2.54	1.96	2.0	4.5	6.0	330	870	1500	1.91	4.25	6.85	5.17
18	10	2.77	1.73	2.0	4.5	6.0	330	860	1500	1.91	4.20	6.85	5.23
13	13	2.25	2.25	2.0	4.5	6.0	330	860	1500	1.91	4.20	6.85	5.23
18	13	2.48	2.02	2.0	4.5	6.0	330	860	1500	1.91	4.20	6.85	5.23
18	18	2.25	2.25	2.0	4.5	6.0	330	850	1500	1.91	4.15	6.85	5.29

3 Rooms

RAS-3M31P2ACVG-SG

230V

Combination			Unit capacity (kW)			Cooling capacity (KW)			Power input (W)			Operating current (A)			COP
Unit A	Unit B	Unit C	Unit A	Unit B	Unit C	Min.	Rated	Max.	Min.	Rated	Max.	Min.	Rated	Max.	Rated
10	-	-	2.70	-	-	1.40	2.70	3.20	270	640	810	1.60	3.50	4.20	4.22
13	-	-	3.70	-	-	1.40	3.70	4.40	270	1040	1340	1.55	5.05	6.20	3.56
18	-	-	4.50	-	-	1.50	4.50	5.00	265	1270	1620	1.50	6.00	7.40	3.54
10	10	10	2.00	2.00	2.00	2.50	6.00	7.50	400	1200	1900	2.20	5.50	8.60	5.00
13	10	10	2.36	1.82	1.82	2.50	6.00	7.50	400	1200	1900	2.20	5.50	8.60	5.00
18	10	10	2.67	1.67	1.67	2.50	6.00	7.50	400	1190	1900	2.20	5.45	8.60	5.04
13	13	10	2.17	2.17	1.67	2.50	6.00	7.50	400	1190	1900	2.20	5.45	8.60	5.04
18	13	10	2.46	2.00	1.54	2.50	6.00	7.50	400	1190	1900	2.20	5.45	8.60	5.04
13	13	13	2.00	2.00	2.00	2.50	6.00	7.50	400	1190	1900	2.20	5.45	8.60	5.04

Specifications

4 Rooms

RAS-4M41P2ACVG-SG

230V

Combination				Unit capacity (kW)				Cooling capacity (KW)			Power input (W)			Operating current (A)			COP
Unit A	Unit B	Unit C	Unit D	Unit A	Unit B	Unit C	Unit D	Min.	Rated	Max.	Min.	Rated	Max.	Min.	Rated	Max.	Rated
10	-	-	-	2.70	-	-	-	1.40	2.70	3.20	350	750	850	2.40	4.30	4.40	3.60
13	-	-	-	3.70	-	-	-	1.40	3.70	4.40	350	940	1200	2.40	4.90	5.70	3.94
18	-	-	-	4.50	-	-	-	1.40	4.50	5.00	350	1240	1435	2.40	5.90	6.80	3.63
10	10	10	10	1.65	1.65	1.65	1.65	3.00	6.60	8.90	490	1200	2500	3.61	6.30	11.70	5.50
13	10	10	10	2.00	1.53	1.53	1.53	3.00	6.60	8.90	490	1200	2500	3.61	6.30	11.70	5.50
18	10	10	10	2.30	1.43	1.43	1.43	3.00	6.60	8.90	490	1190	2500	3.61	6.25	11.70	5.55
13	13	10	10	1.87	1.87	1.43	1.43	3.00	6.60	8.90	490	1190	2500	3.61	6.25	11.70	5.55
18	13	10	10	2.16	1.75	1.35	1.35	3.00	6.60	8.90	490	1190	2500	3.61	6.25	11.70	5.55
13	13	13	10	1.75	1.75	1.75	1.35	3.00	6.60	8.90	490	1190	2500	3.61	6.25	11.70	5.55
18	13	13	10	2.03	1.65	1.65	1.27	3.00	6.60	8.90	490	1180	2500	3.61	6.20	11.70	5.59
13	13	13	13	1.65	1.65	1.65	1.65	3.00	6.60	8.90	490	1180	2500	3.61	6.20	11.70	5.59
18	13	13	13	1.92	1.56	1.56	1.56	3.00	6.60	8.90	490	1170	2500	3.61	6.15	11.70	5.64
18	18	10	10	2.03	2.03	1.27	1.27	3.00	6.60	8.90	490	1180	2500	3.61	6.20	11.70	5.59
18	18	13	13	1.82	1.82	1.48	1.48	3.00	6.60	8.90	490	1170	2500	3.61	6.15	11.70	5.64
18	18	18	10	1.82	1.82	1.82	1.14	3.00	6.60	8.90	490	1170	2500	3.61	6.15	11.70	5.64

5 Rooms




RAS-5M51P2ACVG-SG

230V

Combination					Unit capacity (kW)					Cooling capacity (KW)			Power input (W)			Operating current (A)			COP
Unit A	Unit B	Unit C	Unit D	Unit E	Unit A	Unit B	Unit C	Unit D	Unit E	Min.	Rated	Max.	Min.	Rated	Max.	Min.	Rated	Max.	Rated
10	-	-	-	-	2.70	-	-	-	-	1.40	2.70	3.20	650	750	830	3.90	4.05	4.25	3.60
13	-	-	-	-	3.70	-	-	-	-	1.40	3.70	4.40	650	1220	1520	3.95	5.90	7.00	3.03
18	-	-	-	-	4.50	-	-	-	-	1.40	4.50	5.00	650	1520	1715	3.75	7.20	7.85	2.96
10	10	10	10	10	1.66	1.66	1.66	1.66	1.66	3.70	8.30	11.50	640	1660	3200	4.15	7.60	11.00	5.00
13	10	10	10	10	2.04	1.57	1.57	1.57	1.57	3.70	8.30	11.50	640	1660	3200	4.15	7.60	11.00	5.00
18	10	10	10	10	2.37	1.48	1.48	1.48	1.48	3.70	8.30	11.50	640	1650	3200	4.15	7.55	11.00	5.03
13	13	10	10	10	1.93	1.93	1.48	1.48	1.48	3.70	8.30	11.50	640	1650	3200	4.15	7.55	11.00	5.03
18	13	10	10	10	2.25	1.83	1.41	1.41	1.41	3.70	8.30	11.50	640	1650	3200	4.15	7.55	11.00	5.03
13	13	13	10	10	1.83	1.83	1.83	1.41	1.41	3.70	8.30	11.50	640	1650	3200	4.15	7.55	11.00	5.03
18	13	13	10	10	2.14	1.74	1.74	1.34	1.34	3.70	8.30	11.50	640	1640	3200	4.15	7.50	11.00	5.06
13	13	13	13	10	1.66	1.66	1.66	1.66	1.66	3.70	8.30	11.50	640	1630	3200	4.15	7.45	11.00	5.09
18	13	13	13	10	1.95	1.59	1.59	1.59	1.59	3.70	8.30	11.50	640	1630	3200	4.15	7.45	11.00	5.09
13	13	13	13	13	1.66	1.66	1.66	1.66	1.66	3.70	8.30	11.50	640	1630	3200	4.15	7.45	11.00	5.09
18	13	13	13	13	1.95	1.59	1.59	1.59	1.59	3.70	8.30	11.50	640	1630	3200	4.15	7.45	11.00	5.09
18	18	13	13	13	1.87	1.87	1.52	1.52	1.52	3.70	8.30	11.50	640	1620	3200	4.15	7.40	11.00	5.12
18	18	18	10	10	1.95	1.95	1.95	1.22	1.22	3.70	8.30	11.50	640	1630	3200	4.15	7.45	11.00	5.09



TOSHIBA HAORI DESIGN

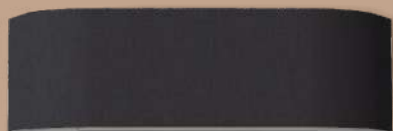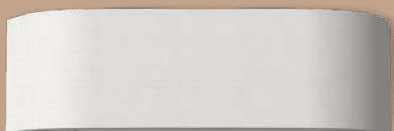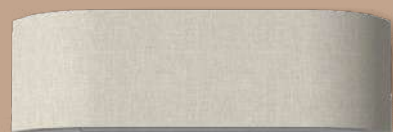

A COOLER STYLE OF LIVING



Online Store:
www.shophaori.com

Hotline: 97735167
Email: sgshophaori@carrier.com

A Carrier Company.



©2026 Carrier. All Rights Reserved.